




SAHH BEARING OF ENGLAND CORP.

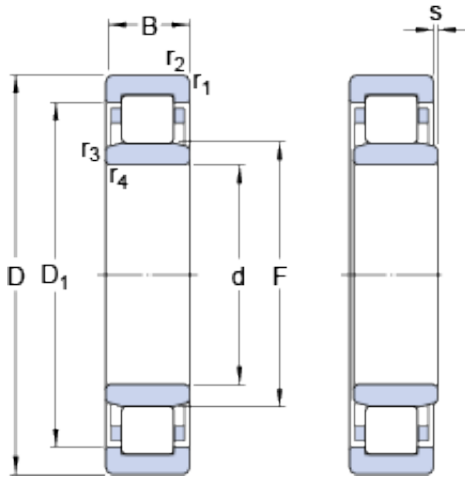

40 mm x 80 mm x 23 mm 40 mm x 80 mm x 23 mm SKF NU 2208 ECP Belgium Bearing 40X80X23

Bearing No. NU 2208 ECP

NU 2208 ECP Bearing 2D drawings and 3D CAD models

Size	80x40x23 mm
Bore Diameter	80 mm
Outer Diameter	40 mm
Width	23 mm
d	40 mm
D	80 mm
B	23 mm
D ₁	67.4 mm
F	49.5 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	1.1 mm
s	1.9 mm
d _a - min.	47 mm
d _a - max.	48 mm
d _b - min.	51 mm
D _a - max.	72.8 mm
r _a - max.	1 mm
r _b - max.	1 mm
Basic dynamic load rating - C	81.5 kN
Basic static load rating - C ₀	75 kN
Fatigue load limit - P _u	9.6 kN
Reference speed	9500 r/min
Limiting speed	11000 r/min



SAHH BEARING OF ENGLAND CORP.

Calculation factor - k_r	0.2
Category	Cylindrical Roller Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.503
EAN	7316577029225
Product Group	B04144
Bore Profile	Straight
Cage Material	Polymer
Precision Class	RBEC 1 ISO P0
Number of Rows of Rollers	Single Row
Separable	Inner Ring - Both Sides
Rolling Element	Cylindrical Roller Bearing
Profile	Complete with Outer and Inner Ring
Snap Ring	No
Internal Clearance	C0-Medium
Retainer	Yes
Relubricatable	Yes
Inch - Metric	Metric
Other Features	High Capacity Plain Inner Ring 2 Rib Outer Ring Cage on Outer Ring ID
Long Description	40MM Bore; Straight Bore Profile; 80MM Outside Diameter; 23MM Width; Polymer Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium Int
Category	Cylindrical Roller Bearing
UNSPSC	31171547



SAHH BEARING OF ENGLAND CORP.

Harmonized Tariff Code	8482.50.00.00
Noun	Bearing
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	NU 2208 ECP
Weight / LBS	1.109
Bore	1.575 Inch 40 Millimeter
Outside Diameter	3.15 Inch 80 Millimeter
Width	0.906 Inch 23 Millimeter
bore diameter:	40 mm
precision rating:	RBEC 1 (ISO Class Normal)
outside diameter:	80 mm
maximum rpm:	11000 RPM
overall width:	23 mm
bearing material:	Steel
flanges:	(2) Outer Ring
cage material:	Polyamide
bore type:	Straight
finish/coating:	Uncoated
number of rows:	1
closure type:	Open
internal clearance:	C0
application:	Piston Type Machines, Rolling Mills, Spindles/Machine Tools
ring separation:	Separable Ring
outer ring width:	23 mm
operating temperature range:	Maximum of +300 ° F
fillet radius:	1 mm
dynamic load capacity:	81.5 kN
series:	NU22
static load capacity:	75 kN



SAHH BEARING OF ENGLAND CORP.

D_1	67.4 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	1.1 mm
s max.	1.9 mm
d_a min.	47 mm
d_a max.	48 mm
d_b min.	51 mm
D_a max.	72.8 mm
r_a max.	1 mm
r_b max.	1 mm
Basic dynamic load rating C	81.5 kN
Basic static load rating C_0	75 kN
Fatigue load limit P_u	9.65 kN
Calculation factor k_r	0.2
Limiting value e	0.3
Axial load factor Y	0.4
Mass bearing	0.49 kg